




Performance



Technical Information

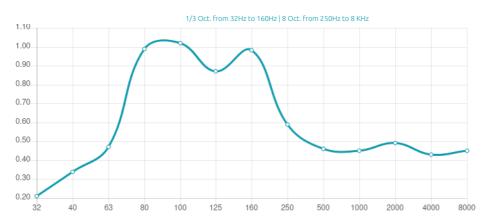





Features

Туре:

Pistonic Diaphragmatic Absorber

Absorption range: 80 Hz to 120 Hz

Peak Absorption Frequency: 90 Hz

Material:

- Natural Wood veener | Lacquered HMDF
- Marine grade plywood structural frame
- Calibrated cell acoustic foam

This panels can only be installed on vertical wall corners. Not for ceiling use.

Dimensions:

FG | 595x1190x56mm | 8.52 Kg


artnovion

Athos W - Bass Trap - Wall

Wall Bass Trap

With a peak absorption from 80 Hz to 120 Hz, the Wall Bass Trap offers an enriched acoustic experience, directly attenuating standing waves. The various front designs available for the Wall Bass Trap allow you to create artistic patterns when mounted on the walls of your home studio or recording room, completely indistinguishable from the Artnovion absorber range.

The Wall Bass Trap - 595 x 1190 - equivalent to 2 standard panels, is equipped with a weighted pistonic membrane enclosing a volume with a high performance acoustic core. This design allows for a precisely tuned, high performance absorption. Bringing you the maximum performance in as least space as possible.



Product finishes

(FG) Product Fire Grade - Furniture Grade











FG | (L10) Bronze FG | (L11) Raw White

FG | (L02) Noir

FG | (L03) Rouge

FG | (L05) Silver

FG | (L06) Noir Vintage





FG | (L07) Graphite FG | (L08) Rose Gold FG | (L09) Classic Black



Gold



FG | (L12) Raw Black FG | (W01) Cerise FG | (W02) Marron FG | (W03) Wenge

Recommended for

- Vertical Wall

Purpose

- Room mode control - Bass ratio control

- Low frequency RT reduction - Improving low frequency response

- Reducing low frequency time decay

- Small Room Acoustics
- Acoustic pressure zones

Fixing Systems

Wall

